

Underhook/Inline load link



Underhook/Inline load link with capacity from 2,0T to 120,0T


Accuracy of 0,2% +-1d.

Performens:

- Underhook with 10 m. cable to instrument, handheld type or indicator with 25 mm. large digit.
- Underhook with wireless transfer of data to instrument.
- Underhook with display.
- Underhook with display and wireless transfer of data to instrument.

Under hook/inline load link

Type	Article no	Length in mm	Width in mm	Hole diameter	Weight in kg
2,0T	D2000A-2T	150	95	-	2,5
6,5T	D2000A-6,5T	220	95	30 mm	4
12,5T	D2000A-12,5T	250	95	36 mm	4,5
25,0T	D2000A-25T	340	108	52 mm	8
55,0T	D2000A-55T	440	160	73 mm	16
120,0t	D2000A-120T	500	200	102 mm	37

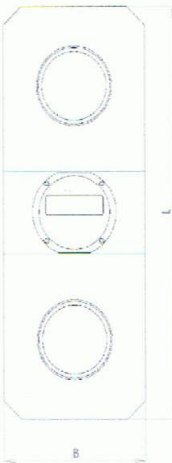

Accessories

Type	Article no.
Transmitter	2000B-6V-RTX
Blackbox for	2000-C
Metalsuitcase for Dynamometer Only from 2,0t to 25,0T	KUF-ALU
Exit for printer or pc	U-P-P
Charger	1890128



Transmitter for dynamometer
2000B-6V-RTX



Black box with display
2000-C

Notice : Regarding calibration ,Mechanic up to 100T / Electronic up to 120T. IP67